



FEED THROUGH	Link pins 1,2 and 7,8 are connected to TRRS pins S,R2 and R1,T respectively
All contacts rated for 12VDC @ 1A	



183mm cable P/N TelINF/TRRSMC6

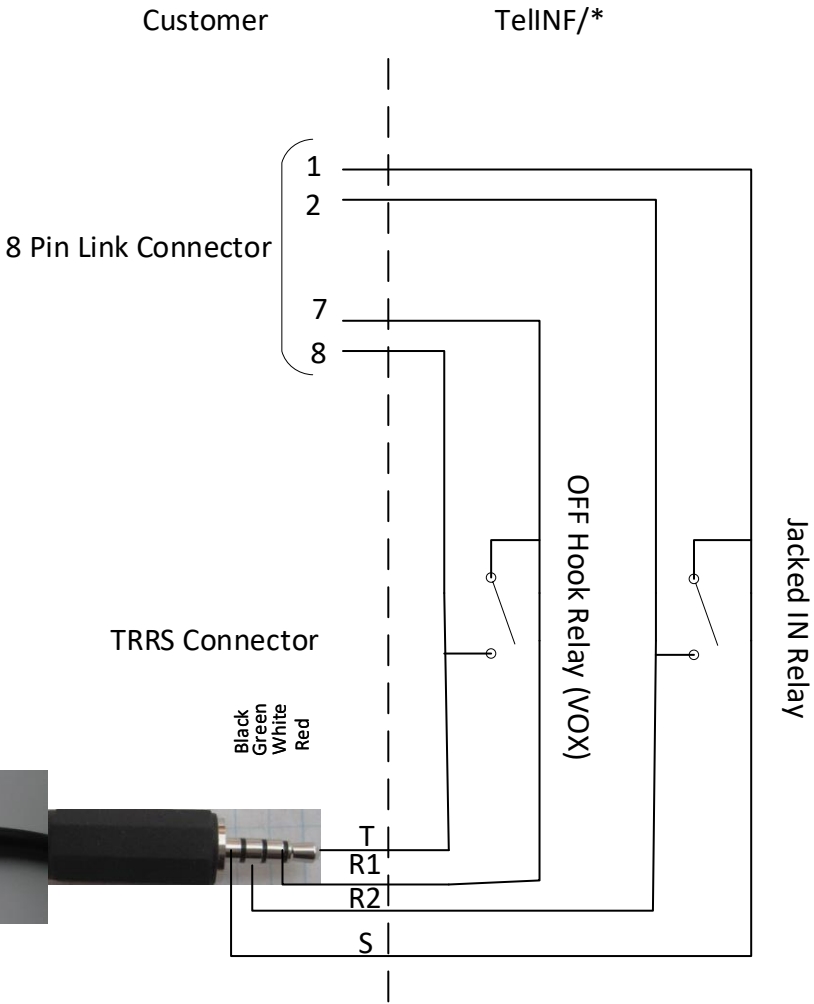

	TRRS Application Notes FEED THROUGH			
	TelINF / USB / TRRS			
	SIZE	FSCM NO	DWG NO	REV
2020/10/2	SCALE	1:1	SHEET	1 OF 1