


TelINF/USB to Motorola MCC 7100 Console

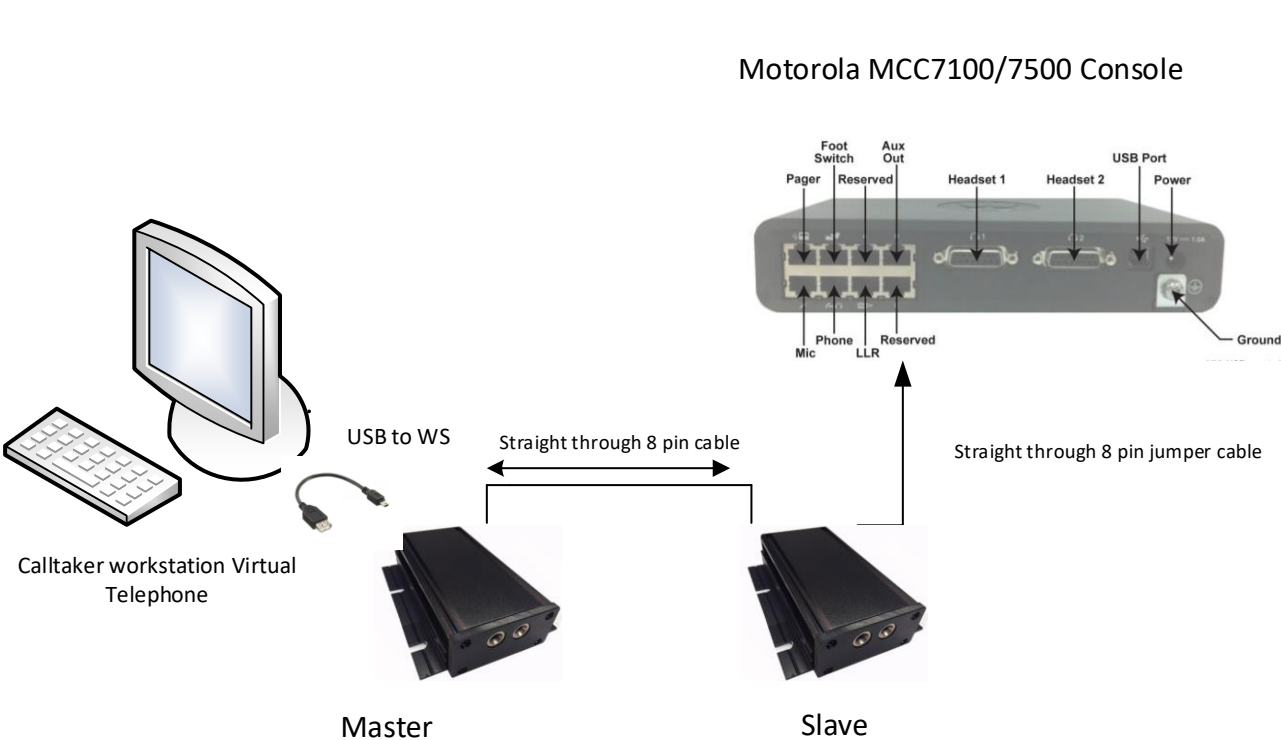

The Master TelINF/USB/MCC provides the (VOX) and the binary jacked-in signal  
The Master must be programmed for dual jack operation  
See TRRS Application notes

|                                                                                                      |                            |         |        |        |
|------------------------------------------------------------------------------------------------------|----------------------------|---------|--------|--------|
| <br>ADDISYSTEMS | TelINF USB dual connection |         |        |        |
|                                                                                                      | TelINF / USB / MCC         |         |        |        |
|                                                                                                      | SIZE                       | FSCM NO | DWG NO | RFV    |
| 2020/10/25                                                                                           | SCALE 1:1                  |         |        | 2      |
| SHEET                                                                                                |                            |         |        | 1 OF 1 |